

DATA SHEET

15-LEKGN3S-W3

Frequency: 1500-2500 MHz

Splits: 3 Way

3WAY WILKINSON SPLITTER

Power Rating: 30W

IM3: N/A

Connector: SMA-Female

Usage: Indoor

BRIDGE
Components

OVERVIEW


BRIDGE SPLITTERS are suitable for all In-building or Outdoor DAS signal enhancements projects.

KEY FEATURES

- Available in 2/3/4Way
- PIM level is optional at -150dBc/-155dBc/-160dBc
- Available with N, Din and 4.3-10 type connectors
- High IP Class, up to IP65
- Compact, light weight and easy to install

TECHNICAL DATA

Product Pictures

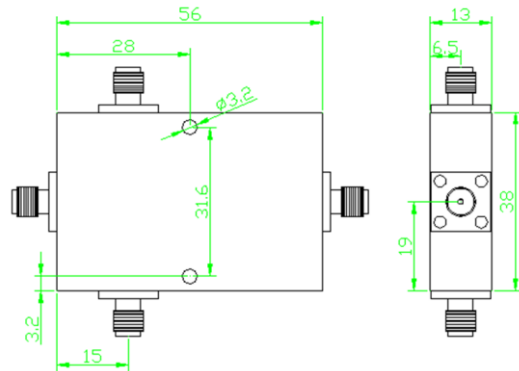

Electrical Specifications

Frequency Range (MHz)	1500-2500 MHz
Splits loss	4.8 dB
Insertion loss	≤0.3 dB
VSWR/ Return loss	≤1.35 dB/-16.5 dB
Power Rating	30 W
Impedance	50Ω

Mechanical Specifications

Connectors	SMA-Female
Dimensions	56 x 38 x 13 mm
Weight	0.2 kg
Color	Gray or Black

Environmental Specifications

Temperature	-40°C ~+85°C
Humidity	≤95%
IP Rating	IP40

Installation Specifications

Installation Method	Wall Mounting
---------------------	---------------

Disclaimer All images are for reference purposes only

Revised: | B.1.1

Important Notice: Information contained in this data sheet is believed to be reliable at the date of issue, accuracy and completeness is not guaranteed. Bridge Components holds the right to change the product specifications without notice.