



Frequency: 880-960MHz

Gain: 11±1dBi

Power Rating:100W

Connector: N-Female


OVERVIEW

BRIDGE OMNI ANTENNAS are fully compatible with any Cellular, IoT, TETRA, WIFI, VHF and UHF network system. The antennas have a High-Band-Width 360° design and are made with high quality fiberglass and rugged elements, allowing the antennas to withstand outdoor environments.

KEY FEATURES


- N, Din and 4.3-10 connector are available upon request
- High gain and compact size
- Antennas have an IP protection rating of IP65 making them suitable for outdoor applications

Product Pictures

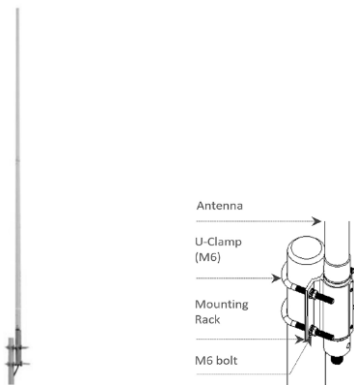


Radiation Diagrams

Horizontal plane pattern



Vertical plane pattern



TECHNICAL DATA

Electrical Specifications	
Frequency Range (MHz)	880-960MHz
Gain	11±1dBi
VSWR	≤1.5
Polarization	Vertical
Beamwidth- H	360°
Beamwidth- V	6°
Power Rating	100W
Impedance	50Ω

Mechanical Specifications	
Connector	N Female, Bottom
Dimensions	Φ52x3200mm
Weight	2.8kg
Radome Color	Gray/White/Black
Radome Material	Fiber-reinforced plastic

Environmental Specifications	
Wind Load	60m/s
Temperature	-30°C~+70°C
Humidity	≤95%
IP Rating	IP65
Lightning Protection	DC Ground

Installation Specifications	
Installation Method	Pole Mounting
Mounting Pole Diameter	Φ40- Φ80mm