

10-P02GN-OS1

Frequency: Shown Under
AISG by pass: TBD

PENTAPLEXER

Power Rating: 20W
IM3: N/A

Connector: SMA Female
Usage: IP65 Indoor & Outdoor




OVERVIEW

BRIDGE COMBINERS are used to combine two different system signals and output signal from com port. The combiners are integrated with technology to enhance the low PIM, isolation and other key parameters.

KEY FEATURES

- Available in various DC/AISG by pass configurations
- N, Din 4.3-10 connectors, available upon request
- Single or twin type available

Product Picture

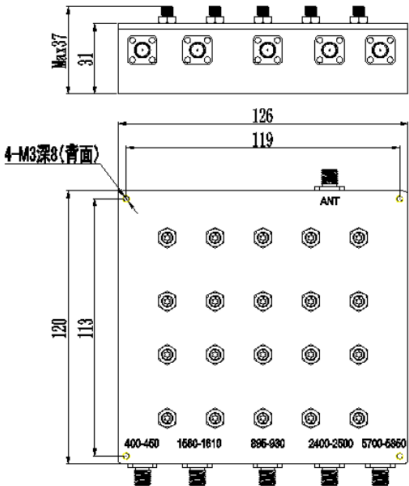

TECHNICAL DATA

Electrical Specifications		
Frequency Range	Band 1	430-450 MHz
	Band 2	895-930 MHz
	Band 3	1560-1610 MHz
	Band 4	2400-2500 MHz
	Band 5	5720-5850 MHz
Insertion loss	Port 1	≤1.0 dB
	Port 2	≤1.0 dB
	Port 3	≤1.0 dB
	Port 4	≤1.0 dB
	Port 5	≤1.2 dB
Band rejection		≥ 50 dB
VSWR/ Return loss		≤1.3/-17dB
DC/AISG by pass		TBD
Power Rating		20W
Impedance		50Ω

10-P02GN-OS1

Frequency: Shown Under
AISG by pass: TBD

PENTAPLEXER

Power Rating: 20W
IM3: N/A
Connector: SMA Female
Usage: IP65 Indoor & Outdoor



Mechanical Specifications	
Dimension	126x120x31 mm
Weight	0.7kg
Color	Black

Environmental Specifications	
Temperature	-40~+80℃
Humidity	≤95%
Lighting Protection	TBD
IP Rating	IP65,Indoor&Outdoor

Installation Specifications	
Installation Method	Wall Mounting
Pole Diameter	N/A