

DATA SHEET

10-D01EX-IX | DIPLEXER

Frequency: Band 1: 790-862 MHz, Band 2: 880-960 MHz | **PIM3:** ≤-150/-155/-160dBc | **Connector:** 4.3-10 Female

Usage: Indoor



OVERVIEW

Bridge Multi-Band Combiner is the product to fast combine two or more different system signals and output from Com port.

Bridge combiner integrated with multi-technology to enhance the low PIM, isolation and other key parameters. Pure silver plating is guaranteed in production processing.

In the section of materials selection, Bridge products are all made of good and rugged materials, which make sure long product working life and stable working performance.

TECHNICAL DATA


Part Number			
Unit Type		Single Unit	Twin Unit
PIM3 (2x43dBm)	≤-150dBc	10-D01E3-IS	10-D01E3-IT
	≤-155dBc	10-D01E5-IS	10-D01E5-IT
	≤-160dBc	10-D01E7-IS	10-D01E7-IT

FEATURES

- Available for various of DC/AISG by pass configurations.
- Low PIM, high isolation and good return loss.
- Built-in lightning protection.
- Wall or pole mounting.
- 4.3-10/Din connector type is optional.
- Single and twins type is optional.
- Cost-effective design

Electrical Specifications		
Frequency Range	Band 1	790-862 MHz
	Band 2	880-960 MHz
Insertion loss	Band 1	≤0.5dB
	Band 2	≤0.5dB
Isolation		≥50dB
VSWR/ Return loss		≥19dB
DC/AISG by PASS	Band 1	Pass
	Band 2	Pass
Power Rating		100W
Impedance		50Ω

Product

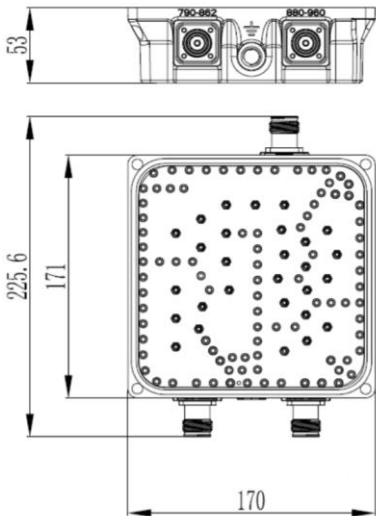

Mechanical Specifications	
Connectors	4.3-10 Female
Dimensions	171x170x53 mm
Weight	1.5kg
Color	Black

Environmental Specifications	
Temperature	-40°C~+65°C
Humidity	≤95%
IP Rating	IP40, Indoor

Installation Specifications	
Installation Method	Wall Mounting



Precise Cavity Processing



Excellent&100% Silver Plating

Unit measurements in mm

Disclaimer: All images are for reference purposes only

Revised | B.1.1

Important Notice: Information contained in this data sheet is believed to be reliable at the date of issue, however accuracy and completeness is not guaranteed.

Bridge Components holds the right to change the product specifications without notice.